

ENV ENCLOSURES

WALL / FLOOR MOUNTING

A range of steel cases to cover up to 7.5 kVA single phase transformers. The cases are fully ventilated and are suitable for floor or wall mounting.



The lid is drip proof and the construction is a three piece design for easy wiring and installation.

All cases are supplied with two 20 mm conduit entries.

The enclosures are IP23 protection as standard; IP54 or IP65 cases are optional.

Transformers can be supplied with cases to customer design.

Dimensions

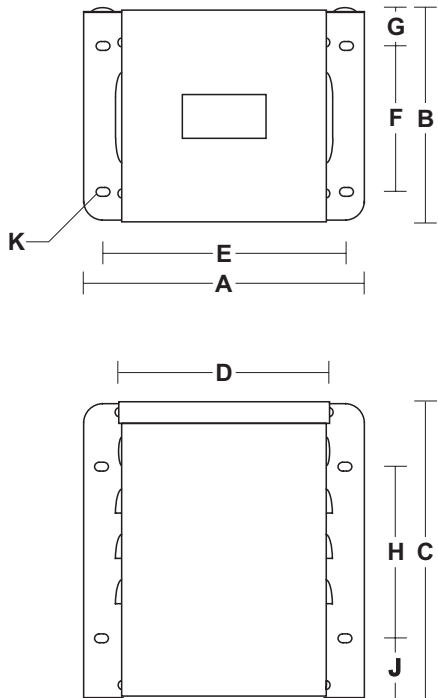

SHEET STEEL CONSTRUCTION GREY STOVE ENAMEL FINISH

Product Code	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	J mm	K mm	Weight kg
ENV 0	197	120	130	127	162	63	29	74	30	8	1.0
ENV 1	197	120	194	127	162	63	29	127	34	8	1.6
ENV 2	220	162	223	152	184	114	24	152	36	8	1.8
ENV 3	270	184	244	189	235	114	35	152	46	8	2.7
ENV 4	337	220	270	254	298	114	35	152	59	8	4.1
ENV 5	350	248	353	280	318	159	45	228	63	8	5.8
ENV 6	384	312	454	305	337	162	75	254	100	8	8.4

HDE

Large Transformer Enclosures

Transtamp  Q06015

Product Data Sheet 408/2 Issue 0

HDE ENCLOSURES - FLOOR MOUNTED

A range of steel cases to cover 7.5 - 50 kVA single phase and up to 75 kVA three phase. The cases are fully ventilated having louvered sides and an open base for optimum convection providing maximum dissipation of heat.



All cases are suitable for floor mounting only and are supplied with two 20 mm conduit entries.

The enclosures are IP23 protection as standard; IP54 or IP65 cases are optional.

Transformers can be supplied with cases to customer design.



Dimensions

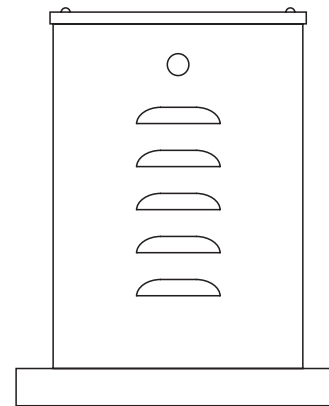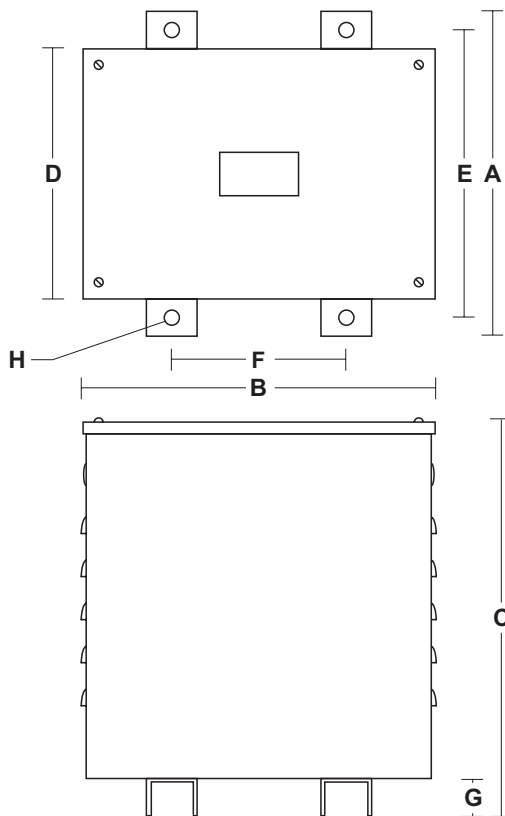

SHEET STEEL CONSTRUCTION GREY STOVE ENAMEL FINISH

Product Code	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Weight kg
HDE 0	300	420	370	220	270	240	40	12	11.0
HDE 1	470	340	610	360	405	180	40	12	18.5
HDE 2	530	370	730	445	470	240	40	12	23.5
HDE 3	380	420	480	300	330	240	40	12	14.8
HDE 4	470	480	610	360	405	300	40	12	20.6
HDE 5	530	525	730	415	470	360	40	12	26.7